


Technical Memo No. 96

Commercial Swing Door Stop Locations


Tired of going back to jobs adjusting commercial swing doors after they have dropped because of incorrect toe and heeling procedures?

Well, Lidco offers a solution to this problem with the introduction of the rotating glass stop (part 03-547) as a stocked accessory item to compliment the 717 system commercial swing doors.


The rotating glass stop is easily fixed by way of drilling a 6mm dia hole in the centre of the glazing pocket, below, and then simply push the stop into the hole.

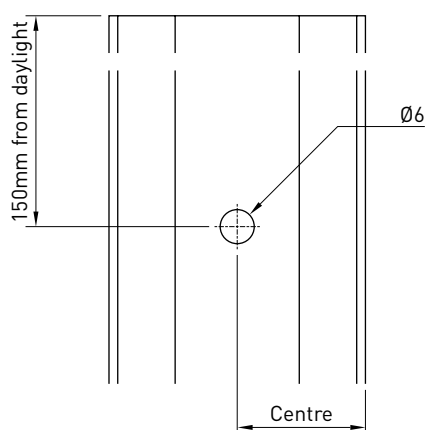

The adjusting stop may then be rotated left or right to leave a clear pocket ready for the glass installation.

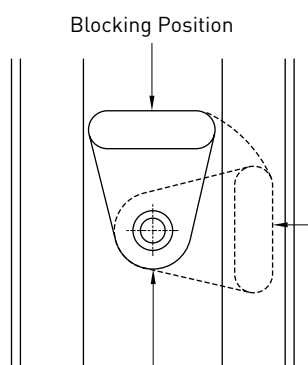

Once stop is set into position opposite side to glass insertion point, the other side is then rotated to the stop position.

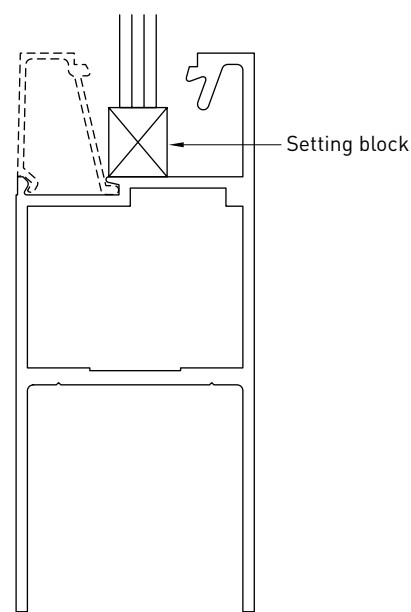

One setting block is placed under glass. The glass adjusting screw, right, is then wound down to come in contact with the top of the glass, keep winding until the stile rises up to the correct position.

For more information please contact your Lidco account manager.

